

RUGGED REBOOT RELAY

Web , script, and automatic control.



Instantly reboot, start or stop equipment in remote locations. Control and reboot securely from a web browser or via program control. Increase uptime. Simplify wiring.

The rugged relay is a hardened version of our popular DIN relay. It's a low-cost, easy-to-use alternative to PLCs and PC-based controllers. Control one or hundreds of Ethernet relays from a single script. Access via the web from anywhere. Up to eight simultaneous control connections are supported by the internal web server in each relay.

Use the "Auto-Ping" feature to automatically monitor critical network devices, such as wireless access points, routers, IP cameras, mobile devices and servers. If a device goes down, the relay will automatically reboot it with no user intervention. "Locked-up" devices are brought back to life instantly, improving system reliability. Windows and SYSLOG utilities provide event notifications. The relay is fully compatible with other DLI power control products.

The IP67 hermetic enclosure makes it ideal for industrial and mobile applications.

Eight individually controlled relays give you flexibility for almost any industrial application. Relays can be linked to high-current contactors to control larger loads.


Typical delivery is 30 days ARO, depending on component availability. MOQ is 50 units.

- Controls routers, access points, IP cams, machinery, industrial process equipment... almost any AC or DC device.
- Use scripts to automate control from remote LAN locations via LAN or WAN. An internal web server gives you manual or automated control from anywhere in your LAN or WAN.
- Clock / calendar with battery backup schedules events and starts user-defined scripts. Now includes NTP time sync.
- Easy-to-use scripting language, HTTP control system and user utilities are compatible with other DLI products.
- Control directly via web http requests, simple scripts, program control, or automatically with AutoPing. Supports SYSLOG and external Windows utilities.
- Eight sturdy SPDT dry-contact relays are individually controlled over Ethernet by scripts or web commands.
- 10/100 autosensing plug-and-play Ethernet connection with static IP allows connection anywhere on your LAN or WAN.
- Multiple power-up recovery modes include sequential on, all-off, last state, start script, etc.
- Switching power supply operates efficiently from any 12-28VDC negative ground supply.
- Conformally coated and sealed in a welded aluminum enclosure finished in enamel or CARC paint.




2695 Walsh, Santa Clara, CA 95051
(408) 330-5599 digital-loggers.com


Rugged IP-67 Packaging

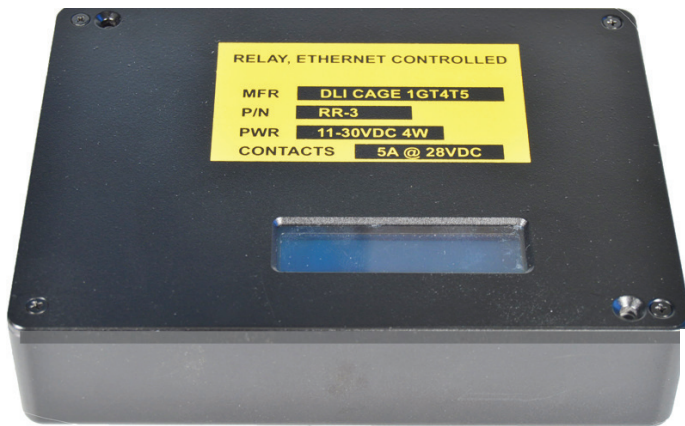

Proven Control Design

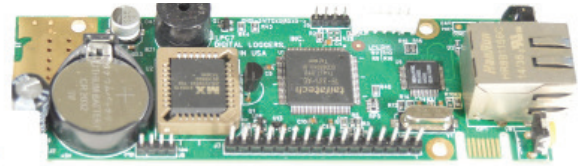

Durable Relays, Power Supply and I/O

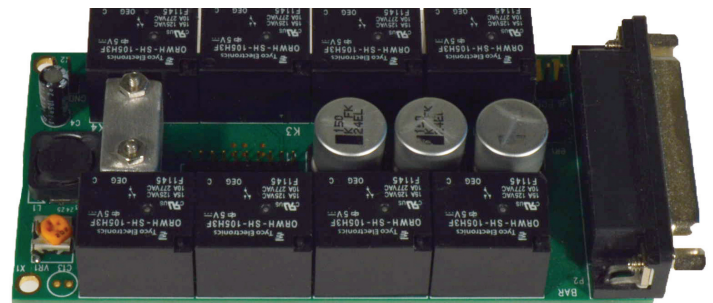

SPECIFICATIONS

Connector (relays)	DN series hermetic DB-25	Power Dissipation	4.1W Max (relays on) <2 W idle
Connector (net/pwr in)	DN DB-9	Power Fail Hold-Over	200ms min. (24V, all relays on)
Clock Calendar	9s / week typical accuracy 10 year lithium battery backup supports NTP time sync	Power-Up Settings	Last relay settings, all relays off, return to pre-powerloss state, sequential ON or run user script
Dimensions	6.4 x 3.18 x 1.875 incl mtg tabs subject to change, future version will be miniaturized	Relay Contact Rating	10A 277VAC 6A 28VDC derated to 5A for DB25 connector
Enclosure Material	Machined 6061 aluminum customer choice of finish. CARC paint	Relay Part No	Tyco ORWH-SHS-105H3F or Potter Brumfield 1-1721150-0
Ethernet Interface	10/100 autosensing, Static IP, TCP port selectable, internal EMI filters.	Scripting Language	BASIC, supports AutoPing, SYSLOG, up to 63 concurrent threads
Input Voltage	11-28VDC via DB9 OVP @ 32V	Software Controls (via web or script)	Individual relays on/off, all on/ network settings, web links, outlet and relay names, multiple power-on modes for safety
Program Memory	Locked FLASH or optional OTP	Switches & Reset	UVLO and reset, no external access
Password Transmission	Encrypted, base 64 Movable HTTP port	Users	Up to 8 simultaneous logins, subject to memory limitations
Operating Temperature	-30° to 170°F, -34° to 77°C hermetically sealed and con- formal coated, but best suited for dry environments	Vibration	Tested to ASTM D3580
		Weight	Bare unit 4.1 lbs, Ship wt. 6.3 lbs

P/N RR3